

ARDEX K 520™

Self-Leveling Concrete Topping

As a Topping...


- Install:** Walk on in 2-3 hours.
- Thickness:** Install from 1/4" to 1" neat, and up to 3" with aggregate
- Seal:** In as little as 24 hours.
- Coverage:** 25 sq. ft. per bag at 1/4"

When Polishing...

- Thickness:** Install from 3/8" to 1" neat, and up to 3" with aggregate
- Polish/Seal:** In as little as 24 hours
- Coverage:** 16.7 sq. ft. per bag at 3/8"
- Compressive Strength:** 6,800 psi



For complete technical documentation, please see the Technical Data Sheet at www.ardexamericas.com

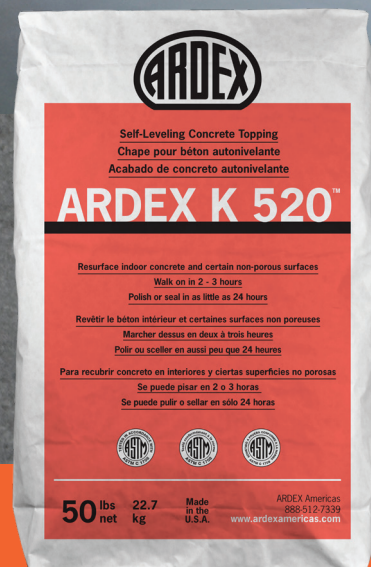

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339

www.ardexamericas.com