



**POUR & SEAL**

**POUR & POLISH**

**PREMIUM TOPPINGS**

**MICRO-TOPPING**

**EXTERIOR**



ARDEX Americas • 400 Ardex Park Drive  
Aliquippa, PA 15001 USA • 888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)

# COMMERCIAL AND RESIDENTIAL FLOORING SOLUTIONS

## POUR & SEAL



### ARDEX K 520™

Self-Leveling Concrete Topping


Walkable in 2-3 hours / Seal in as little as 24 hours /  
Polish in as little as 24 hours / Interior residential  
or commercial floors

### ARDEX K 301™

Exterior Self-Leveling Concrete Topping

Smooth new or existing concrete and approved  
non-porous surfaces / Suitable for use in wet areas /  
Use for exterior and interior applications

## POUR & POLISH

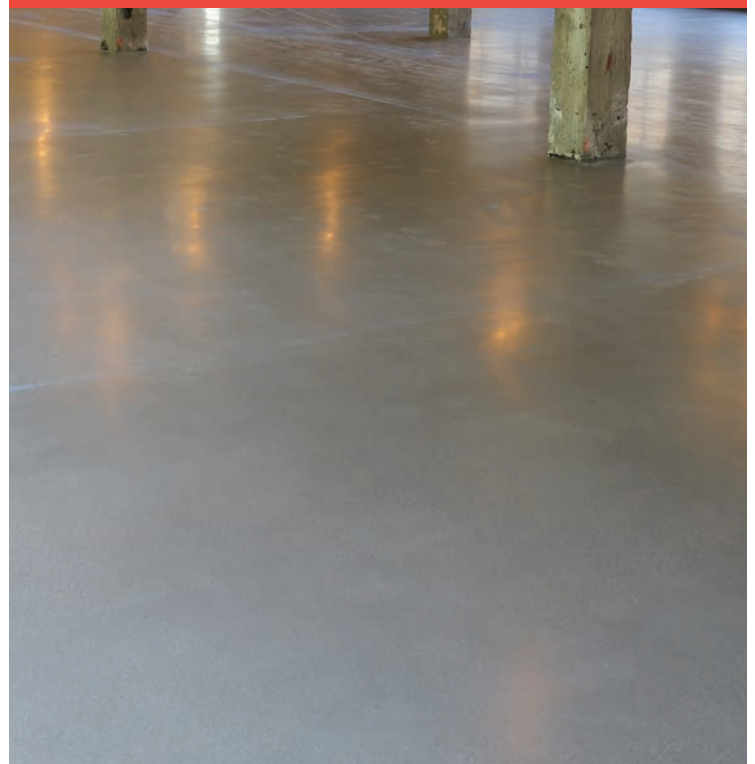

### ARDEX K 520™

Self-Leveling Concrete Topping

Walkable in 2-3 hours / Seal in as little as 24 hours /  
Polish in as little as 24 hours / Interior residential or  
commercial floors

### ARDEX K 521™

Self-Leveling Concrete Topping  
with Aggregate Surface

Mix of light aggregates / Aggregate  
mix of 2 to 3 mm in size

### ARDEX K 523™

Self-Leveling Concrete Topping  
with Aggregate Surface

Mix of light and dark aggregates, for a salt and  
pepper look / Aggregate mix of 2 to 3 mm in size

ARDEX Surfaces allow for a wide array of finished surfaces that install fast thanks to an exclusive self-drying technology, and last for decades. ARDEX Surfaces are flooring toppings that range from turn-key pour and seal to designer or artistic floors that can match any designer's vision. When you install ARDEX Surfaces, you'll have a beautiful, durable floor for years to come.

- Provide consistent, smooth floor with unique finish
- Variety of solutions to match existing floors or create a new, unique look
- Self-drying, high-performance products install quickly

## PREMIUM TOPPINGS



### ARDEX PC-T™

Polished Concrete Topping

Fine sand aggregate / 6100 PSI at 28 days / Walkable in 2-3 hours / Available in light gray, gray and white

### ARDEX SD-T®

Self-Drying, Self-Leveling  
Concrete Topping

6100 PSI at 28 days / Seal in as little as 2-3 hours / Available in gray and white

## MICRO-TOPPINGS



### ARDEX SD-M™

Designer Floor Finish™

5000 PSI at 28 days / Walkable in as little as 2 hours / Begin processing in 24-72 hours / Available in gray and white



# EXTERIOR



## ARDEX CD™ Concrete Dressing

Resurface worn and spalled concrete to provide a “new concrete” finish / Suitable for foot and rubber tire traffic on commercial and residential applications / Use for interior and exterior floors and walls

## TOPPINGS

**ARDEX SD-T®** Self-Drying, Self-Leveling Concrete Topping  
(Available in Gray and White)

- The perfect topping to provide a highly durable uniform look
- Walk on and seal in as little as 24 hours

**ARDEX K 520™** Self-Leveling Concrete Topping

- Resurface indoor concrete and certain non-porous surfaces
- Walk on in 2 - 3 hours, seal in as little as 24 hours
- Polishable in as little as 24 hours

## POLISHABLE TOPPINGS

**ARDEX PC-T™** Polished Concrete Topping

(Available in gray, light gray or white)

- The perfect topping to provide a uniform look and durability for polished concrete floors
- Polish in just 24 hours

**ARDEX K 520™** Self-Leveling Concrete Topping

- Resurface indoor concrete and certain non-porous surfaces
- Walk on in 2 - 3 hours, seal in as little as 24 hours
- Polishable in as little as 24 hours

**ARDEX K 521™** Self-Leveling Topping with Aggregate Surface

- Pourable Self-Leveling Topping with a light-colored aggregate reveal
- Walkable in 2-3 hours, mechanically polish in as little as 24 hours

**ARDEX K 523™** Self-Leveling Topping with Aggregate Surface

- Pourable Self-Leveling Topping with a blend of light and dark aggregates
- Walkable in 2-3 hours, mechanically polish in as little as 24 hours

## MICRO-TOPPINGS

**ARDEX SD-M™** Designer Floor Finish™

(Available in Gray and White)

- Use over concrete, terrazzo, tile and underlayments when only a micro layer is needed
- Can be used as pinhole filler for polished concrete and ARDEX Polished Concrete Systems (APCS) applications

## CONCRETE TREATMENTS

**ARDEX PC 10™** Lithium Hardener for ARDEX PC-T™ Polished Concrete Topping

- For use in the grinding and polishing of ARDEX SURFACES
- Increases reflectivity and lowers maintenance costs

**ARDEX PC Finish™** Stain & Wear Protection - High and Low Gloss

- Increases abrasion and stain resistance
- Available in high gloss and low gloss

## SUBSTRATE PREPARATION

**ARDEX EP 2000™** Substrate Preparation Epoxy

- Required primer for decorative applications of ARDEX self-leveling toppings

**ARDEX MC™ RAPID** one-coat moisture control system

- For RH readings up to 100%
- Install ARDEX Toppings and Underlayments in just 4 hours

## CONCRETE CRACK & JOINT TREATMENTS

**ARDEX ARDISEAL™ RAPID PLUS** Semi-Rigid Joint Sealant

**ARDEX ARDIFIX™** Low Viscosity Rigid Polyurethane Crack and Joint Repair



ARDEX Americas • 400 Ardex Park Drive  
Aliquippa, PA 15001 USA • 888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)