

# ARDEX EB 2™

## Fast-Setting Screed Cement

Polymer-modified, Portland cement-based, hydraulic cement for producing bonded, un-bonded, or floating screed beds for use with all types of flooring systems.

Use with ARDEX Self-Leveling Toppings, Underlayments and ARDEX MC™ Moisture Control Systems.

### Key Features

- **Rapid setting**
- **Ideal as a screed bed for tile and stone installations**
- **For bonded, unbonded and floating screed beds**
- **Ideal for high traffic installations**
- **Interior or exterior**


### Installation

- **Package:** 50 lbs (22 kg)
- **Coverage:** 40 sq. ft. at 3/4" (3.7 m<sup>2</sup> at 1.9 cm)\* with 5:1 sand
- **Thickness:**
  - Bonded Screed Bed - 3/4" to 2" (1.9 to 5 cm)
  - Unbonded Screed Bed - 2" (5 cm) to no limit
  - Floating Screed Bed - 3" (7.5 cm) to no limit
- **Working time:** 60 minutes
- **Walkable:** 3 hours
- **Install:**
  - Tile in 3 hours
  - All other floor coverings in 24 hours\*

### Performance

- **ASTM C109/mod:** Compressive Strength up to 8,400 psi (590 kg/cm<sup>2</sup>)\* at 28 days.
- **VOC:** 0

\*Varies based on mix ratio and depth.

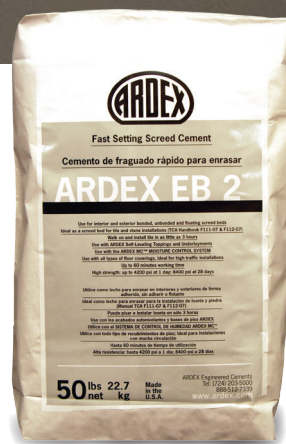

SUBSTRATE  
PREPARATION



+1-724-203-5000  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)

AF412 11/14